


Liao hao banben



## Network Intelligent PTZ camera



User Manual

Note: The camera picture in the user manual for reference only, please take the physical object as the standard.


## Table of contents

- Packing list ..... 1
- Product structure -front ..... 2
- Product structure--back ..... 3
- Download the App ..... 4
- User Sign up , Log in ..... 5
- Add the camera ..... 6
  - 一、 QR code networking to add the device ..... 6
  - 二、 Scan QR code to add device ..... 7
  - 三、 Fast networking to add the device ..... 7
  - 四、 Smartlink to add the device ..... 7
- Function introduction ..... 8
- FAQ ..... 9
- Note ..... 10

## Packing list

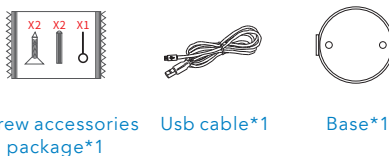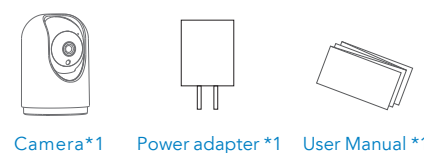


## Product Structure-Front

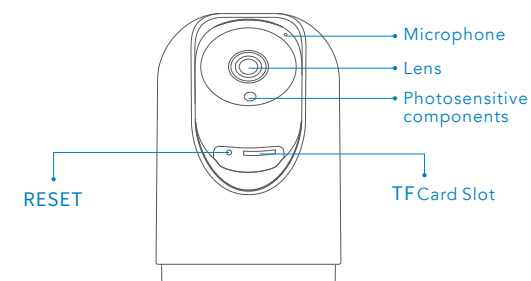

Content	Description
RESET	Use reset pin press about 3-5s to restore the factory default.
TF卡槽	Support TF card local storage (Maximum support 128G), please format the TF card in the "Yoosee" APP for the first time using.

## Product Structure-Back

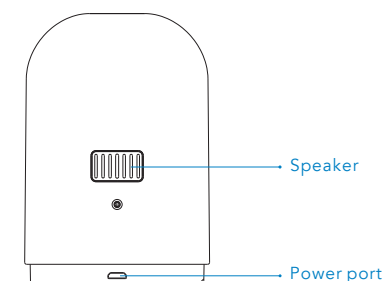

Content	Description
Power Port	DC 5V


## Download the APP

Scan the bellow QR code or search the "Yoosee" in the APP store or google play , then download and install the APP.



## User register and Login

- (1) Sign up : Click "Quick register" and can use the phone number or email to register new account
- (2) Input the account number & "password" or other login methods like "Wechat" or "Line" or "Facebook"

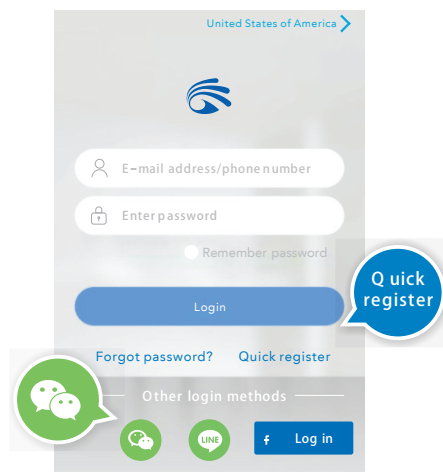

5

## Add the camera

Note: Select any below method to add the camera, "QR code networking" recommended

Preparation  
Make sure the wifi for phone connection is 2.4G and in good condition (5GHz not supported), wait for the device until emits a "du du" sound (if not just press the "reset" for 3-5s until the device send out "du du" sound), open the "Yoosee" APP, click "+" and enter to the device list screen.

一、 Add the device by "QR code networking"  
Select "QR code networking", input the wifi password the phone connected and click "Next", make the QR code generated by the APP be facing the camera lens about 10-15cm, wait for the voice prompts, when you hear "Start configuration, device is on line already", then the configuration was completed.



6

## Add the camera


二、 Scan QR code to add the device  
Select "Scan QR code to add the device", scan the QR code on the camera, input your wifi password and click "next", wait for the voice prompts, when you hear "Start configuration, device is on line already", then the configuration was completed.

三、 Fast networking  
Select "Fast networking", input your wifi password and click "next", select the AP hot spots searched (device is automatically connected wifi at the moment), wait for the voice prompts, when you hear "Start configuration, device is on line already", then the configuration was completed.

四、 Smartlink  
Select "Smartlink", input the wifi password the phone connected and click "Next", the device will send out sound waves (turn up the phone volume and take the phone close to the camera), wait for the voice prompts, when you hear "Start configuration, device is on line already", then the configuration was completed.

7

## Function introduction

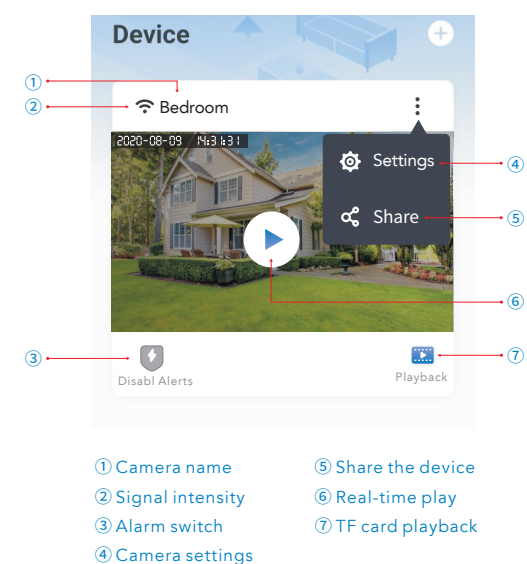

- ① Camera name
- ② Signal intensity
- ③ Alarm switch
- ④ Camera settings
- ⑤ Share the device
- ⑥ Real-time play
- ⑦ TF card playback

8

## FAQ

- ① Q: Device is offline in device list?  
A: Check the power adapter working in normal, if the TF card be inserted, please take out the TF card and reset the device and routers to see if the camera is online.
- ② Q: can not see the playback?  
A: Unplug the TF card and re-insert, make sure the record mode is open, if opened but no recording, please follow [Settings]-[Record settings]-[TF card recording switch]-[Format TF card], if still can not see please replace a new TF card to try.
- ③ Q: How to deal with the false positives of the motion detection?  
A: Can adjust the sensitivity to reduce the false positives.

9

## Notice

The Device maximum support 128G, the TF card should be formatted with fat32 format (the device uses loop record technique. When SD card is full, the camera will cover the earliest files automatically to save new videos).

The device will bound with the APP account automatically after connecting to the network, before binding a new account, please unbind the device with the first account.

Please do not install the product in a harsh environment. The product may be damaged if exposed to high temperatures, high humidity, dust and smoke environment etc.

"Yoosee" APP and the device firmware will be updated from time to time. If the system has an upgrade prompt, please update it online.

Yoosee CMS is available in windows PC for camera surveillance. Please go to <http://www.yoosee.co> and download to install.

10