


Intelligent Battery Powered Camera
User manual

Note: The camera picture in the user manual for reference only, please take the physical object as the standard.

Table of contents


Packing list01
 Product structure02
 Product structure03
 Installation04
 Download the APP05
 Add the camera06
 Scan QR Code to add the device.....06
 EZ Mode to add the device.....07
 Function introduction.....08
 FAQ09
 Warranty10

Packing list

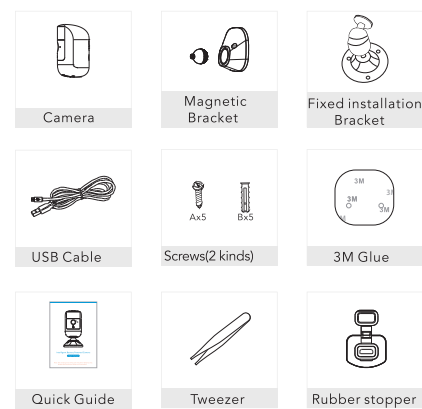

01

Product structure

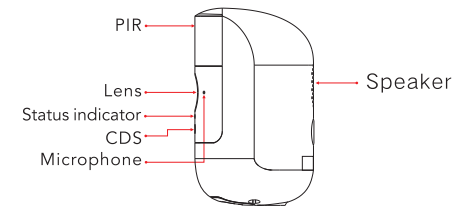


Content Description

The red indicator flickers slowly :wait the user to add the device
 The red indicator flickers quickly : connecting the WIFI
 The red indicator normally on :no internet accessed
 The blue indicator normally on :the camera is online

02

Product structure

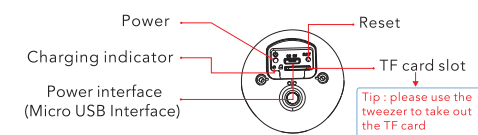


Content Description

Power interface : DC 5V±10%
 Power : Long press the power button for about 3-5s to open/close the camera.
 Reset : Long press the reset button for about 5s to restore the factory default.
 TF card slot : Support TF card local storage (Maximum support 128G) , please format the TF card in the "TuyaSmart" APP for the first time using.
 Charging indicator : The red light is normally on, the camera is charging.
 The blue light is normally on, the charging is finished.

03


Installation

■ Installation of rubber plug

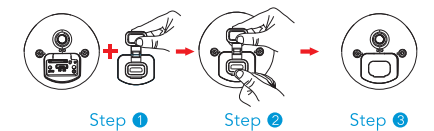

Tip: if the rubber plug is not installed, the water-proof will be affected.

■ Wall/Desk mounting

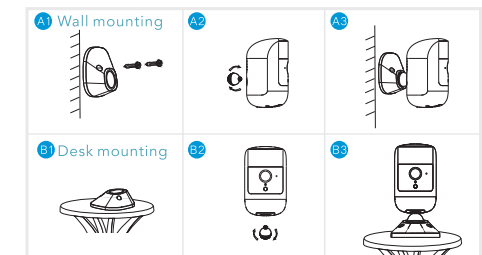

Tip: Please install the camera in the suitable location where the WIFI network is good , otherwise the device maybe will not working properly!

04

Download the APP


Scan the bellow QR code or search the "TuyaSmart" in the APP store or google play , then download and install the APP.



Scan and install TuyaSmart App

■ User register and Login

- (1) Register : Select your country to register an account with your email.
- (2) Log in : Select your country, enter the existing account and password to log in



05


Add the camera

Preparation

Make sure the wifi for phone connection is 2.4G and in the good network condition (5GHz not supported) ,wait for the the red light of the device flickers slowly(if the red light of the device is not flickering slowly, long press the reset button for about3- 5s until the camera emits a "BUGU" sound , wait for the device to restart then add the camera)Open the "tuya smart " APP , Click "Add Device"or "+" icon in the upper right corner to add the camera ,select "Security Sensors" , then click "Smart Camera" and enter to the camera list screen.

一、 Add the device by "QR code "

Select "QR code" ,click "Next" , input the wifi password the phone connected and click "Next" , make the QR code generated by the APP be facing the camera lens about 15-20cm , wait for the device send out "BUGU " sound , click "I Hear a Prompt" ,then APP is automatically searching the device to add at the moment.




06

Add the camera


二、 EZ Mode to add the device

Select "EZ Mode" ,click "Next" , input the wifi password the phone connected and click "Next" , then APP is automatically searching the device to add at the moment. , wait for the device send out "BUGU " sound , then the configuration was completed.

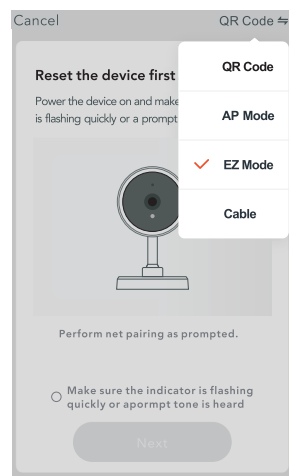

07

Function introduction

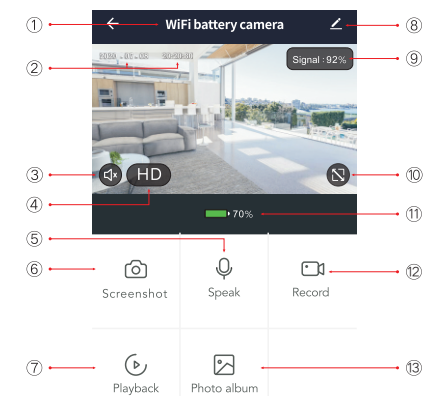

- | | |
|-----------------------------|-----------------------|
| ① Camera name | ⑧ Settings |
| ② Time of the camera | ⑨ Signal |
| ③ Voice of the device | ⑩ Full screen preview |
| ④ Definition of the Picture | ⑪ Battery capacity |
| ⑤ Speak | ⑫ Record |
| ⑥ Screenshot | ⑬ Photo album |
| ⑦ Playback | |

08

FAQ

- ① Q: Failed to add during network configuration?
A: Please make sure your phone is connected to a router in the 2.4GHz band, and make sure that the Wi-Fi password is correct.
- ② Q: After scan adding is still unsuccessful?
A: Restart the device or power off the device after scan adding is still unsuccessful, and then try to add it again.
- ③ Q: The device cannot preview normally?
A: Please check if the network signal is too weak, please put the camera close to the router, if still cannot preview, reset the camera and add it again.
- ④ Q: After resetting the device, why is the camera still in the device list?
A: Resetting the device only to reset the camera's network configuration, but cannot change the configuration on the APP, to delete the camera, you must log in the APP to delete.
- ⑤ Q: How to switch the camera network to another router?
A: First remove and reset the device on the APP, and then configure the network for the device again through the APP.
- ⑥ Q: Why does the device can not recognize the TF card?
A: Please insert and remove the TF card after power off, please check if the TF card is working normally and whether it is in FAT32 format, when the mobile phone or the device is working in unstable network, the APP also will prompt that the TF card cannot be recognized.

09

Warranty

Dear users,

Thank you for using our products. please read the following terms carefully before installing the product

1.The warranty period is one year since the date of purchasing.Within the warranty period, the trouble caused by the quality problem of the product in the case of normal use will be maintained by our company free of cost.

2.The following cases are beyond the warranty range:

- Any faults or defects caused by improper operating environment or operation.
- Any faults or defects caused by improper installation, misuse,unauthorized maintenance, revision, accident, force majeure or other external factors.
- Any faults or defects caused by using the product, software or component of the third party.
- The product has been beyond the warranty period.
- The product barcode cannot be identified or is mismatched.
- The faults or damage not arising from the design, technology,manufacturing and quality problems of the product.

10