


BCS0261 V1.2




Quick Guide

Version V1.0

Content


- What 's in the box01
- Product structure02
- App operation guide03
- How to setup(Wireless connection).....04
- App function display 1-105
- App function display 1-206
- Camera Settings07
- Functions08
- Precautions09
- Warranty10

What 's in the box

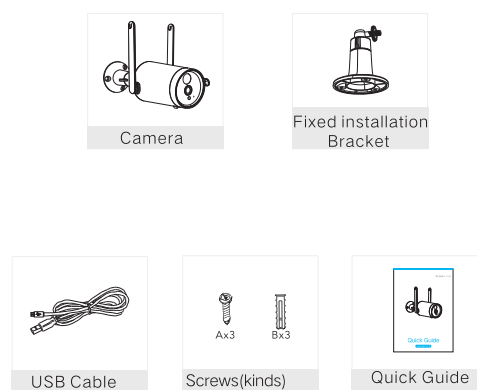

01

Product structure

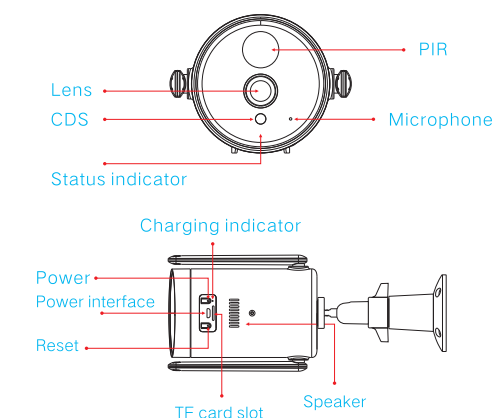

■ Status indicator

The red indicator flickers slowly :wait the user to add the device
The red indicator flickers quickly :connecting the WIFI
The red indicator normally on :no internet accessed
The blue indicator normally on :the camera is online

02

App operation guide


■ Download the APP

Scan the below QR code or Search "Cloudedge" on Google play / App store to download the app



■ User Sign up

You can sign up an account by email , Click " Sign up " then select the country or region you are located and complete your register



03

How to setup (Wireless connection)

1.Place the camera and phone within 30cm-100cm of the router, then connect the phone to wifi.




2.Power on the camera

Press and hold the power button for 5 seconds to turn on the camera ,if can not power on , please plug in DC5V 1A/2A phone adaptor to charge 15min firstly ,ensure the indicator slowly blinking in red (if not blinking red,press the reset button 5 seconds to reset the camera)



3.Add the camera

• Log in Cloudedge APP, click + and select "Battery Camera".
• Select 2.4GHz wifi SSID and enter your password, tap "Next".
• Scan the QR code in front of the camera , after the device recognizes the QR code , it will sound "bugu" then tap "hear Tone"




• Camera will start connecting wifi and skip to the page where the connection is successful , you can edit the camera name , then click "Done" to open the camera in my device list and you can watch the live video .

04

App function display 1-1


■ Video playing

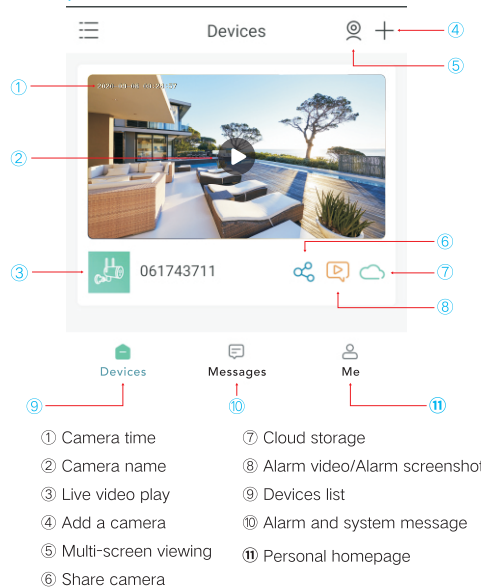

- ① Camera time
- ② Camera name
- ③ Live video play
- ④ Add a camera
- ⑤ Multi-screen viewing
- ⑥ Share camera
- ⑦ Cloud storage
- ⑧ Alarm video/Alarm screenshot
- ⑨ Devices list
- ⑩ Alarm and system message
- ⑪ Personal homepage

05


App function display 1-2

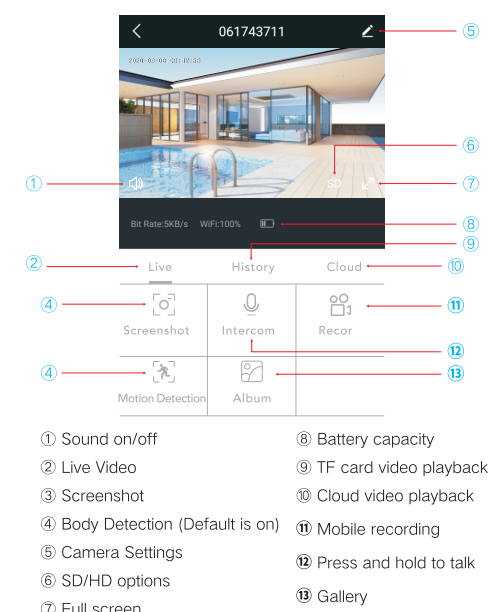

- ① Sound on/off
- ② Live Video
- ③ Screenshot
- ④ Body Detection (Default is on)
- ⑤ Camera Settings
- ⑥ SD/HD options
- ⑦ Full screen
- ⑧ Battery capacity
- ⑨ TF card video playback
- ⑩ Cloud video playback
- ⑪ Mobile recording
- ⑫ Press and hold to talk
- ⑬ Gallery

06

Camera Settings

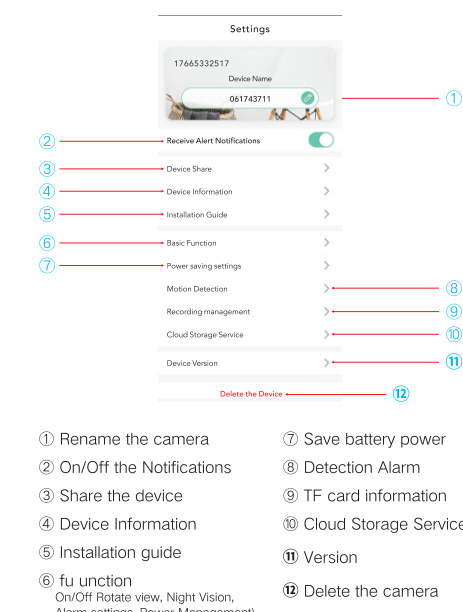

- ① Rename the camera
- ② On/Off the Notifications
- ③ Share the device
- ④ Device Information
- ⑤ Installation guide
- ⑥ fu unction
On/Off Rotate view, Night Vision, Alarm settings, Power Management)
- ⑦ Save battery power
- ⑧ Detection Alarm
- ⑨ TF card information
- ⑩ Cloud Storage Service
- ⑪ Version
- ⑫ Delete the camera

07

Functions

■ Remote wake-up

The camera will be in a sleep mode to save power,you can have a preview in App

■ Two way Audio

You can see and talk with the visitor in you App from the camera

■ Low battery alarm

You can set a low-battery alarm threshold in your phone App, the threshold is set to a minimum of 10% and a maximum of 50%,When the battery power of the camera is lower than the set threshold,the App will have a reminder.

■ Record

Using TF card or enable the Cloud-Storage Service,to keep recording for every moment

■ Day&Night

Powerful night vision means no interruptions,even in complete darkness.



Daytime

Night

08

Precautions

Important Notes for Reducing False Alarms

- Do not install the camera facing any objects with bright lights,including sunshine,bright lamp lights,etc.
- Do not place the camera too close to a place where there frequently moving vehicles , Based on numerous tests.
- Do not install the camera facing the mirror, Keep the camera at least 1 meter.
- The recommended distance between the camera and vehicles is 15 meters.Stay away from the outlets,including air conditioner vents,humidifier outlets.
- the heat transfer vents of the projectors,etc.away from any wireless devices,including Wi-Fi routers and phones , in order to avoid wireless interference.

Troubleshooting & suggestion		
NQ	Description	Solution and operation
1	Unable To Connect	1. Check your wifi name and password 2. Ensure your wifi is 2.4G,not support 5G 3. Ensure your camera and phone close to router
2	Reset	1. Press and hold on the reset button for 5 seconds 2. Hear "bugu" sound 3. Red light turns to slow blinking
3	Change to new network	1. Press reset key to factory default settings 2. Re-connection
4	Failed to add device	Please Enable Cloudedge App cellular data on mobile settings
5	No alarm push	Please Enable Cloudedge App notification on mobile settings
6	No alarm video record	Please Insert TF Card

09

Warranty

Dear users,
Thank you for using our products. please read the following terms carefully before installing the product.
1. The warranty period is one year since the date of purchasing. Within the warranty period, the trouble caused by the quality problem of the product in the case of normal use will be maintained by our company free of cost.
2. The following cases are beyond the warranty range:
• Any faults or defects caused by improper operating environment or operation.
• Any faults or defects caused by improper installation, misuse, unauthorized maintenance, revision, accident, force majeure or other external factors.
• Any faults or defects caused by using the product, software or component of the third party.
• The product has been beyond the warranty period.
• The product barcode cannot be identified or is mismatched.
• The faults or damage not arising from the design, technology, manufacturing and quality problems of the product.

10